


# MSP-SERIES SCREW PRESENTERS

- The screw presenter is ideal for automation and robotic manufacturing applications. It operates in combination with a robotic screw driving system that is equipped with a vacuum attachment to pick up a screw from the presenter screw guide.
- Screws are poured into the hopper of the screw presenter and automatically lined up for dispensing.
- This simple mechanism allows trouble-free operation, eliminating jammed or stuck screws.
- An inexpensive screw presenter is an alternative tool instead of the cumbersome and costly screw feeder systems.
- The unit is flexible to adjust for different screw sizes. Adjustable vibration and speed settings.
- Optimizes the manufacturing process with efficiency by mechanically presenting a screw to a fixed pick-up point
- The compact system can fit into any work environment for easy accessibility and provides virtually maintenance-free operation.



Model	Item #	Max Screw Head Dia. "D"	Screw Size Capacity "d"	Max Screw Head Height "t"	Max Screw Length "L"
MSP-812A	144797	6mm	M0.8 - M2.0	3mm	8mm
MSP-616	144778	11mm	M1.2 - M5.0	9mm	15mm
MSP-1070	144781	13mm	M1.7 - M6.0	10mm	24mm

**Note!** Screw Presenter requires the use of magnetized bit with the power tool.

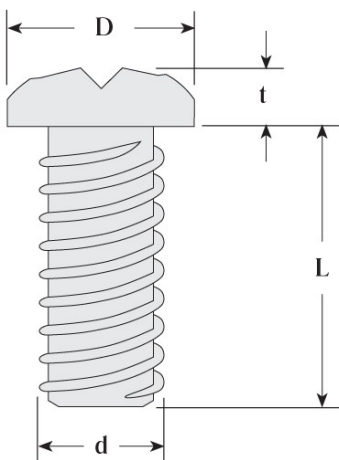

## Related Products

### Mag-O-nets

Place on a bit to magnetize.



### Scout II

Error-proofing device to detect and eliminate costly screw-fastening errors.




## MSP-SERIES AUTOMATION SCREW PRESENTERS

- The automation screw presenter is ideal for robotic manufacturing applications. Operates in combination with automation & robotic screw driving systems.
- Screws are poured into the hopper of the screw presenter and automatically lined up for dispensing.
- This simple mechanism allows trouble-free operation, eliminating jammed or stuck screws.
- The cost-effective automated screw presenter is an alternative machine instead of the cumbersome and costly screwfeeder systems.
- Smoothly feeds screws. Adjustable vibration and speed settings.



Models	Item	Screw Size Capacity "d"	Max Screw	Max Screw Head	Max Screw
			Head Height "t"		
MSP812M	144798	M0.8 - M2.0	3mm	6mm	8mm
MSP619-10	144783	M1.0	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-12	144784	M1.2	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-14	144786	M1.4	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-16	144785	M1.6	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-18	144787	M1.8	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-20	144788	M2.0	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-23	144789	M2.3	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-25	144790	M2.5	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-26	144791	M2.6	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-27	144792	M2.7	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-30	144795	M3.0	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-35	144793	M3.5	0.2 - 6	1.2 - 12	1.0 - 14
MSP619-40	144794	M4.0	0.2 - 6	1.2 - 12	1.0 - 14
MSP-1069G	144796	M4.0	0.2 - 6	1.2 - 12	1.0 - 20

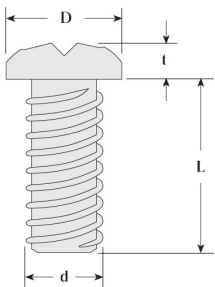

**Note!** Screw Presenter requires the use of a vacuum attachment with the power tool.